

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/235305086>

# Applied qualimetry: Its origins, errors and misconceptions

Article in *Benchmarking An International Journal* · May 2011

DOI: 10.1108/146357711111137796

---

CITATIONS

16

READS

34

2 authors, including:



Alexander Kostin

Financial University under the Government of the Russian Federation

1 PUBLICATION 16 CITATIONS

SEE PROFILE

# Benchmarking

*An International Journal*


## **Applied qualimetry: its origins, errors and misconceptions**

**Garry G. Azgaldov**

*Central Economics and Mathematics Institute, Russian Academy of Sciences,  
Moscow, Russia*

**Alexander V. Kostin**

*Centre for Intellectual Property Introduction and Commercialisation,  
Russian State Institute of Intellectual Property, Moscow, Russia*





# Applied qualimetry: its origins, errors and misconceptions

Garry G. Azgaldov

*Central Economics and Mathematics Institute, Russian Academy of Sciences,  
Moscow, Russia, and*

Alexander V. Kostin

*Centre for Intellectual Property Introduction and Commercialisation,  
Russian State Institute of Intellectual Property, Moscow, Russia*

## Abstract

**Purpose** – The purpose of this paper is to provide the reader, who may have little or no knowledge of qualimetry, with first, an outline of the history and development of this relatively new scientific discipline, which deals with the methodology of and problems in the integral quantitative assessment of the quality of objects of any nature: things and processes, products of labour and products of nature, whether material or ideal, animate or inanimate, simple or complex, natural or man-made. etc.; and second, the most common errors that occur in the design and application of quality assessment techniques, which result in the depreciation of findings obtained by these techniques, and methods for eliminating such errors.

**Design/methodology/approach** – The methodology used to obtain the results described in the paper is based on a deductive-axiomatic approach and, occasionally, on expert judgements.

**Findings** – The findings presented in the paper can raise the research community's awareness of the great opportunities that the qualimetry toolbox offers them in addressing their problems; at the same time, they can help them to avoid many pitfalls.

**Practical implications** – The information found in the paper broadens the range of business problems and problem-solving procedures that can make use of qualimetric techniques and approaches.

**Originality/value** – The vast majority of the readers of this journal will find information contained in this paper both novel and potentially useful.

**Keywords** Quality, Quality assessment

**Paper type** Research paper

## Introduction

Measure what is measurable, and make measurable what is not so (Galileo Galilei).



### Qualimetry – what is it?

#### *The rationale of qualimetry*

Scientific and technological progress is marked by steady growth in the use of quantitative techniques to rationalise decision making in industrial management, i.e. in the manufacturing businesses and allied branches of science and technology. This has been a trend throughout written history. As everyone is well aware, if a technology (or a related science) uses numerical techniques, its name often contains the ending -metry or -metrics (from the Greek *μετρεω*, "to measure"). While the ancient world knew but one term with this ending, geometry, the Middle Ages knew of four or five. One of these authors has collected more than 90 such terms, from absorptiometry to uroflowmetry;

and the list is by no means complete. It must be said, however, that this ending is not a necessary or exclusive characteristic of the application of quantitative techniques; more about it later.

The tendency to expand the domain of quantification, i.e. the application of numerical techniques, has some features of its own. To bring them out, we need to bear in mind several factors. It is common knowledge that anything people produce within a definite time period (and what they deal with in commodity exchange or consumption) is expressed by a set of four elements:

- (1) *product*;
- (2) *service*;
- (3) *energy* (such as thermal, electric, compressed air, etc.); and
- (4) *information* (which, like energy, is sometimes reckoned among products).

Each of these elements is fully described by three fundamental parameters:

- (1) *quantity* (in conventional units of measure);
- (2) *cost of production, distribution and consumption/utilisation/exploitation/application of a unit of quantity*; and
- (3) *quality of a unit of quantity*, which hereinafter refers to a totality of such and only such qualities of an object as become apparent in the course of its consumption/utilization/exploitation/application.

As mentioned before, this paper will deal mainly manufacturing businesses, which produce commodities. Therefore, terms in italic type will refer mainly to manufactured products rather than services, information or energy.

The first of these fundamental parameters, *quantity*, is basic to calculations in the engineering disciplines, e.g. design calculation, heat engineering, lighting engineering, materials engineering. The second, *cost*, is studied and recognised by the body of economic disciplines, e.g. production economics, budgeting, production management. As to the third fundamental characteristic, *quality*, until quite recently it was seldom if ever taken into account by either engineering or economic or management disciplines.

This was due to the lack of a theory and a toolbox for valid quantification (estimation) of quality, e.g. product quality. With technological progress this lack in fact generated a social need, which could not but lead to the appearance of *Qualimetry*.

The term qualimetry (from the Latin *quale*, "of what kind"), which designates a scientific discipline studying the methodology and problems of quantitative assessment of the quality of any kind of object (primarily, products), was first used in 1968. That this initiative was timely and justifiable was borne out by a series of international scholarly conferences fully or partly devoted to issues of qualimetry, e.g. in Moscow, Oslo, Varna, Yerevan, Madrid or Tallinn.

The term qualimetry is being gradually admitted into the scientific and engineering vocabularies of many countries. According to Google, tens of thousands of references to publications in 32 languages contain this term.

In the English-language literature, qualimetry is used along with other synonymous terms such as technometry (Technometrics, n.d.), systems analysis (Ifenthaler *et al.*, 2010), hierarchy analysis (Samochvalov, 2004), decision theory (White, 1969), benchmarking and others.

When it first appeared, the term and the respective concept were perceived as unexpected, almost fortuitous; some still regard them as such.

However, it would be wrong to talk of the fortuity of qualimetry. Quite to the contrary, its appearance should be seen as another natural indication, besides the one mentioned at the beginning, of the general broadening of the scope of quantification. The universal and imperative nature of this tendency to widen the application of quantification as a major tool of cognition was expressed by mathematician Yudin (1974): "Quality is yet unknown quantity".

Many great minds were aware of the great influence that mathematics, the general framework of quantification techniques, exerts on the development of science and its close ally, technology.


It is common knowledge (Azgaldov, 1995b) that K. Marx only recognised as science what had a mathematical foundation. A century before him, I. Kant wrote in his *Metaphysical Foundations of Natural Science*, "I maintain, however, that in every special doctrine of nature only so much science proper can be found as there is mathematics in it" (Kant, 1966). Three centuries before Kant, a similar statement was made by Leonardo da Vinci: "No human investigation can be called real science if it cannot be demonstrated mathematically" (Gukovsky, 1947).

Five centuries before Leonardo, in the ninth century, a similar line of thought was pursued by the famous Arab Scientist Abu Yusuf Ya'qub ibn Ishaq Al-Kindi, who saw in mathematics the basis and prerequisite of all science, including philosophy and natural history (Al-Kindi, 1961). Another thirteen centuries earlier, the Greek philosopher Xenocrates of Chalcedon expressed the ancients' idea of mathematics in the following maxim: "Mathematics is the handle of philosophy" (Frolov, 1958). Dozens of years before Xenocrates, or 2,300 years before our time, his teacher Plato said, "Exclude from any science mathematics, measure and weight, and it is left with very little" (Asmus, 1969).

Now, what made qualimetry appear in the 1960s?

Modern management science formulated five necessary and sufficient conditions for the success of any work. They can be represented by the present authors' "condition tree" (Figure 1).

Four of these five conditions – to KNOW, to BE ABLE, to MANGAGE, and to STIMULATE – are relatively easy to meet methodologically, regulatory documents for respective calculations being in place. For example, every branch of material production has its own rate-setter's handbook or a similar document, which is used to calculate the workforce, the time and the tools needed to perform a piece of work (the MANAGE condition). Other documents, like wage rate books, specify the requirements to be met in selecting a workforce to do a piece of work successfully (the BE ABLE condition). It is relatively easy to meet the KNOW condition: you only need to set the task to the job executors. Finally, to meet the STIMULATE condition all businesspersons or managers

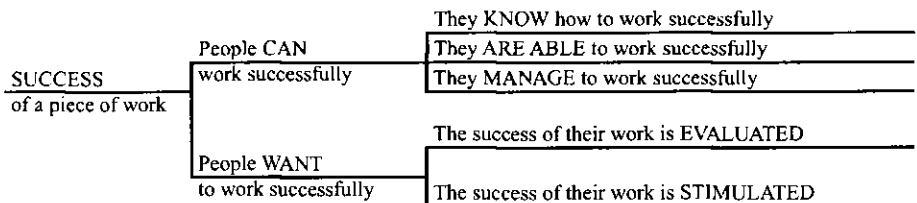

**Figure 1.**  
Necessary and sufficient  
conditions for the success  
of a piece of work

have a broad range of stimulatory actions they can use with their subordinates: material and moral; positive (“carrot”) and negative (“stick”); individual-directed or team-directed; one-off or time-phased, etc.

We have quite a different situation with the EVALUATE condition. What is to be evaluated is a piece of work; and any work (and its output) is characterised by three parameters: quantity, cost and quality. Arguably, in most occupations in the material production field the numerical evaluation of the parameters of quantity and cost does not present essential difficulties.

#### *The difficulty of quantifying quality*

This is not the case with quality. Here, two aspects must be taken into account: the quality of individual labor (simple or complex) and the quality of teamwork. As for individual labor, evaluating it is anything but a trivial task, especially if it must be done in quantitative form and with due regard for the many characteristics that make up its quality.

Evaluating even the simple labour of an industrial worker poses difficulties: it is by far not always that it can be evaluated using a simple reject rate indicator. These difficulties multiply when it is a matter of quantitative assessment of the quality of complex, e.g. intellectual, labor.

Here, is an example to illustrate the importance and complexity of this task. Back in the early 1970s, a group of UNESCO experts surveyed 1,200 research teams in Austria, Belgium, Finland, Hungary and Sweden. Their conclusion: the most vexed problem in raising operating efficiency in science is the lack of a reliable methodology for assessing the quality of work of individual researchers and research teams (Andrews, 1979) (similar examples can be cited with respect of managers, health professionals, engineers, teachers, administrators and some others (Zimmerer and Stroh, 1974)).

Let us, now look at the issue of assessment of the quality of teamwork. It stands to reason that its most important characteristic is the quality of output. As already mentioned, the outcome of any teamwork is either a product or a service or information or energy. Of these four forms that a production outcome may take, the product is by far the most complex in terms of the quality assessment method and the most important in terms of the breadth of its existence domain, given that developed economies manufacture more than 20 million kinds of product.

It all goes to show that:

- (1) In the present-day context, successful, i.e. effective, productive work is a key condition of the economic health of either an individual company or a whole country.
- (2) In addressing the problem of increasing the success/efficiency of any labour the key element is quantitative assessment – both of the process and the outcome of labour, primarily its product.
- (3) Of the three characteristics of labour (and its outcome) – quantity, quality and cost – quality is the most complex in terms of quantitative assessment.
- (4) Until quite recently, the approach to the problem of quantitative assessment of quality (primarily of products) lacked a sound methodological support. At best, isolated quantitative assessment techniques were devised, but they had not any reliable and unified rationale to support them. As a result, quantifications of the quality of one and the same object calculated by different methods could be worlds apart.

A natural corollary to propositions (1)-(4): in the early post-Second World War years, every industrialised country felt the need for scientific rationalisation of the methods of quantitative assessment of the quality of production work and its outcomes.

F. Engels in his day noted that when an engineering need appears in society, it moves science forward faster than a dozen universities. The appearance of qualimetry can be seen as a natural response to the pressing need for generalisation and perfection of the techniques of quantitative assessment of quality.

*The advantage of the accepted terminology*

Our analysis shows that qualimetry is the best possible name for this discipline. Indeed, the Greek root *metreo* has become accepted in the international lexicon of science. As for the Latin root *qualis*, its derivative words in the majority of the languages in which the bulk of scientific and technical literature is published means "quality" (*cualidad* in Spanish, *qualità* in Italian, *kwaliteit* in Dutch, *Qualität* in German). Therefore, the term qualimetry is quite handy: it is concise and it accurately renders the content of the "quality measurement" concept; its main components are intelligible to people speaking different languages; its structure makes it easy to form any derivative words like a qualimetrologist (a qualimetry scientist), a qualimetric approach (a quality measurement approach), etc.

Furthermore, this term is part of a logically bracketed system of concept and terms, e.g. the science of quality (qualilogy) and the related science of quality measurement (qualimetry); one can draw an analogy with some other sciences: economics – econometrics, biology – biometry, psychology – psychometrics.

*Minimum information about the essentials of qualimetry.* This paper does not describe specific methods of qualimetry for it would require a much larger exposition. We only note that qualimetry measures the quality of an object on the 0-100 (or 0-100 per cent) scale, 100 per cent taken as the world's best characteristics of a similar product at the time of evaluation. A detailed exposition of the axiomatics and methodology of qualimetry is found in Azgaldov (1981).

However, being aware that a considerable proportion of the "Benchmarking" readers may not be familiar with the basic principles and terminology of qualimetry, the authors considered it necessary to provide some simple explanations concerning this discipline.

To this end, we introduce some basic concepts used in qualimetry. We recognise the fact that, to date, several approaches to the quantitative assessment of quality have been developed within the framework of qualimetry. The terminology used herein refers to the most common of them (while it features the least labour input it is also least precise and reliable).

*Object*, any thing or process:

- animate (e.g. a human specialist) or inanimate (e.g. a motor car);
- a product of labour (e.g. concrete for road surfacing) or a product of nature (e.g. the surface relief on the alignment of a future motorway);
- material (e.g. a workshop manufacturing products) or virtual (e.g. a television commercial);
- natural (e.g. a mountain landscape) or man-made (e.g. a complex of structures); and
- a product (e.g. clothing) or a service (e.g. the operation and repair of electric equipment).

In what follows, we apply the term “object” to an object such that its quantity in accepted units of measurement equals 1; we can call it singular. Which is to say that one truck can be an object but several (e.g. three) trucks cannot. Similarly, one can of fuel, one batch of a concrete-mixer (of a particular concrete composition), etc.

*Property*, a feature, characteristic or peculiarity of an object that shows itself in the course of its consumption or operation, use or application (hereinafter all these words will be used interchangeably – *Auth.*) according to its purpose, e.g. TV set mass.

We call the reader’s attention to a very important circumstance for understanding the meaning of the term “property”; though it was noted in its definition it may be ignored in practice. To wit: properties are not just any features/characteristics of an object but such and only such ones that show themselves in the course of its manufacture or consumption/application/use/operation.

Here, is an example. Every ferromagnetic article is known to possess the magnetostriction quality, an ability to change its form and size in response to change in the magnetic field.

Let us take a look at two kinds of products made of ferromagnetic (steel): a wrist chronometer watch and the crawler dozer tracks. Clearly, magnetostriction is characteristic of both.

The way magnetostriction shows itself in the chronometer is that its accuracy is impaired under the influence of a strong magnetic. As for the tracks, the magnetostriction phenomenon in the physical sense does occur during their operation. As to its effect, however (for example, the magnitude of the absolute and relative change in their shape and size), magnetostriction does not affect the tracks’s capacity to perform their function, viz to be the driving element of the mover caterpillar belt. Consequently, for these articles, we can think that magnetostriction does not show itself in the course of their consumption (not in a physical, but in an economic, consumer’s sense).

It follows that with an object like a chronometer watch the presence of magnetostriction is to be interpreted as one of its properties, whereas in the case of the caterpillar belt tracks it is not considered to be a property in the sense of the above definition of “property”.

The above-mentioned properties can be classified:

- By the degree of complexity, into complex properties (i.e. decomposable into other, less complex ones) and elementary properties (i.e. non-decomposable ones).
- With respect to the process of want satisfaction, into use properties (or, for simplicity, object properties), which satisfy individual social needs, and reliability properties, by means of which object properties are realised or manifested. Reliability properties as applied to products of labour include storability, flawlessness, maintainability and longevity.

Individual properties (any elementary and some complex ones) can be measured in units of measurement specific to each property. Such a measurement produces values of the *absolute indices of the property*  $Q_i$  ( $i = 1, \dots, n$ ;  $n$  – the number of object properties). Such measurements (i.e. the determination of the values of absolute indices of property) can be done by:

- (a) Methods of metrology (e.g. the measurement of mass, geometric dimension, strength).



- (b) Methods of experimental psychology (e.g. expert measurement of aesthetic, some ergonomic and ecological properties).
- (c) Analytical methods, when we know the functional relationship between the absolute indices of a complex property and its constituent less complex properties (e.g. when we determine the annual capacity of a transport vehicle). For case (c), a complex property will be called a "quasi-elementary" one.

*Quality*, a complex property which is the aggregate of properties such and only such that characterise the results (both desirable/positive and undesirable/negative) obtained during the consumption of an object but do not comprise its costs of creation and consumption. Which is to say that this aggregate is limited to the properties associated with the *result* obtained in consuming an object and does not include properties associated with the *costs* that underlie the result.

We note that:

- the properties that form quality do not include properties that show themselves during the production/creation/formation/manufacturing of objects; for the sake of simplicity in what follows we will commonly use one generic term, manufacturing, instead of four – production, creation, formation, manufacturing – unless the use of the other three synonymous terms is specially provided for; and
- the life cycle of an object will consist by convention of two general stages, production and consumption; subsumed under the latter will be what is known as the distribution stage with regard to some objects that are products of labour.

Thus, when one analyses the quality of an object one can – in fact must – abstract from the product manufacturing method and its costs at the manufacturing and consumption stages and, thus, limit our analysis to the results, positive and negative, obtained at the consumption stage.

The relation between quality and its influencing properties – complex, quasi-elementary, and elementary – can be represented by a hierarchy (a property tree built by the rules defined in qualimetry); at its bottom level is quality (as the most general, complex property of an object) and at its top level are elementary and quasi-elementary properties. The reliability property is not included in the property tree.

Every elementary or quasi-elementary property other than the absolute measure  $Q_i$  is also characterised by a *relative measure*,  $K_i$ , which expresses the degree of manifestation of the property relative to a *benchmark (reference) measure*,  $Q_i^{ben}$ , and a *rejection one*,  $Q_i^{rej}$ :

$$K_i = \frac{Q_i - Q_i^{rej}}{Q_i^{ben} - Q_i^{rej}}. \quad (1)$$

The quantities  $Q_i^{ben}$  and  $Q_i^{rej}$  reflect the level of time-varying social needs. Therefore, the relative measure  $K_i$  characterises the degree to which the need for a particular object property is satisfied. The values of  $K_i$  for the same property, i.e. at a constant  $Q_i$ , may change (as a rule, for the worse) with time as social needs grow, which finds expression in the variation of the values of  $Q_i^{ben}$  and  $Q_i^{rej}$ .

Every elementary or complex property of an object is characterised in quantitative terms by its weight (importance) among all the other properties, the *weight coefficient*,  $G_i$ .

Two groups of techniques can be used to determine the values of these coefficients, expert techniques and non-expert (analytical) ones.

*Reliability properties* are taken into account primarily by means of the *efficiency retention factor*,  $K_{eff}$ , which is the ratio of the total usable time of an object to its benchmark lifetime.

To quantify quality a relative measure,  $K_{rel}$ , is used which is defined by the function  $K_{rel} = f(K_i, G_i, K_{eff})$ ,  $i = 1, \dots, n$ , where  $n$  is the number of elementary and quasi-elementary properties of an object (without considering reliability properties). The function  $f$  can be expressed by polynomials, various means, etc. When some rather soft constraints are fulfilled, the function  $f$  can be represented by the expression:

$$K_{rel} = K_{eff} \sum K_i G_i. \quad (2)$$

If in addition to the properties that form the quality of an object, we consider also the properties that describe the social costs of its manufacturing and consumption (we call them “cost effectiveness”), the totality of these properties forms the so-called “integral quality” of the object. The determination of the values of the integral quality measure  $K_{\Sigma}$  is based on the same principles we have described above as applied to  $K_{rel}$ .

*Cost effectiveness* in some cases can be represented either by so-called “reduced costs” or so-called “full costs”.

From the above definitions of “quality” and “cost effectiveness” (and from the accompanying explanations) it follows that the total set of object properties can be split into two disjoint subsets: properties forming the quality of an object and properties forming its cost effectiveness.

Because the users of an object are not, as a rule, interested in its quality alone not caring about its cost effectiveness, or alternatively, in its cost effectiveness without regard for its quality, it was felt that qualimetry should have a characteristic that would recognise the total set of object properties associated with the results obtained in using the object (quality) and the costs incurred (cost effectiveness).

This characteristic, described as “integral quality” in qualimetry, is thus the most general characteristic of an object, which recognises all its properties.

Inasmuch as quality control is the main – though by no means only – area where the qualimetry toolbox is applied, what follows will primarily refer to this subject field. However, it should be noted that some of the other fields, mentioned above, have addressed similar problems, among them benchmarking (Sullivan, 1986).

#### *Qualimetry and “quasimetry”*

The application potential of qualimetry as a component part of quality control stems from its interdisciplinary and intersectoral character. Its main applications are in problem solving regarding new product planning, market research and competitive power in domestic and external markets.

Special works were written scrutinising the question of how and where managers can apply qualimetric tools in a market economy (Azgaldov, 1991) or relative to competitiveness (Azgaldov, 1990). Experience shows, however, that when qualimetry was applied in this, as well as other, fields, qualimetric tools were sometimes used improperly or crudely (“Improperly” here refers to qualimetric applications not based on a scientifically validated technique of quantitative assessment of quality, which has been developed in theoretical qualimetry).

Improper applications of qualimetry – we call these crude applications “quasimetry” – can have deplorable consequences. Here, is just one example (although many more can be cited).

Back in the 1980s, the Soviet Union saw a strong movement for the introduction of government certification of product quality. Best products meeting world standards were awarded the Quality Seal. To all appearances, figures of merit were calculated on the basis of qualimetry; in actual fact, it was “quasimetry” pure and simple. As a result, by 1985, nearly half (45 per cent) of the products due for certification received the Quality Seal; in industries such as construction engineering and road engineering the figure could be as high as 79 per cent. At face value it was all world-class production, which given its very low pricing should have led to its great growth in competitiveness and, accordingly, a jump in the share of engineering products going for export. In point of fact, quite the opposite happened. By that time, the share of engineering production in Soviet exports had fallen to 4 per cent and that of high technologies, to 0.6 per cent. The root cause was self-deception in quality assessment, made possible by the substitution of “quasimetry” for qualimetry. It makes no difference that it was the time of a planned economy and today we are living in a market economy: the nature and effects of blunders committed in quality assessment are substantially the same (Smelyakov, 1966).

Here, is one more example. In 1999, one of these authors took part in a conference, which considered a progress report on a research project commissioned by the Russian Ministry of Science and Technology. Its subject was “Quality of Life: Criteria and Quantitative Assessment”. Obviously, if the project title includes the two keywords, quality and quantitative assessment, it was supposed – in fact it had – to refer to qualimetry. It was nothing of the kind. The first report variant did not even mention qualimetry. That is not the point, however; after all, as the saying goes, “Call me a pot but heat me not”. The worst of it was that the report suggested that the quality of life be evaluated with a 30-year-old method, ignoring all that had been developed by theoretical qualimetry during that period. One of us tried to open the project leaders’ eyes to the inadmissibility of their technique, which if used could sanctify by the authority of science some off-the-wall conclusions regarding the actual, rather poor, life quality situation in this country.

This brings up the question: why should “quasimetry” rather than qualimetry be used at all? There seem to be two main reasons.

For one thing, it is often thought that quality measurement is quite a simple, if not a primitive problem. Let a chief give direction, and any engineer or economist who is an expert in a branch or a sub-branch of production will develop a quality scoring method. If a computer is used into the bargain, all doubt about the excellence of the method should fall away automatically!

Second, people who devise new or apply existing quality evaluation techniques are overwhelmingly unaware of the existence of theoretical qualimetry, which dictates rather stringent requirements that qualimetric methods must meet if qualimetry is not to turn into “quasimetry”. Regrettably, this is true not only of “ordinary” designers of quality measurement methods but also of some of those who have put into circulation world-known methods. One is Stiftung Warentest in Germany, which regularly publishes its quantitative ratings of the quality of various consumer goods in the *Test* magazine; their findings have been uncritically reprinted by some Russian journals, e.g. *Spros* (“Demand”). As a result, the quantitative ratings of the quality of different

---

samples of goods of the same purpose but different quality permit, at best, to obtain information on an ordinal scale (that is, the *extent* to which these samples differ in quality) but produce no information on a ratio scale (that is, the *degree* of their difference). Yet, this is the claim made by the authors of the respective techniques!

There is one more shortcoming in the quality applications of qualimetry besides improper use, namely, failure to use the qualimetry toolbox where it can and must be applied. However, in view of the limitation on the size of this paper this second shortcoming will not be considered. Those interested in this aspect of the problem are referred to a relatively recent publication, dealing with the most practical fields of application for qualimetry in systems of statistical control of product quality (Azgaldov, 1998).

Therefore, hereinafter the problem of qualimetry will only be discussed in terms of errors in the application of quantitative measures of quality. In other words, the object of this paper is to warn numerous authors in this field against the repetition of such errors.

These errors have been examined by one of the authors (Azgaldov, 1975, 1989). However, given that these sources are relatively rare and thus virtually inaccessible to the readers of "Benchmarking" these authors deemed it possible to reiterate their arguments.

To repeat: the present authors for reasons of the size acceptable for this kind of paper are prevented from making a very strong case or adducing a fairly comprehensive review of publications in this area.

### Typical errors in quality evaluation procedures

These errors can be conveniently considered in the order defined by the acknowledged algorithm of qualimetric analysis (Azgaldov, 1994). Notably, they have been found in papers since the institutionalisation of qualimetry (in 1968) to the present.

#### *Specification of basic terms*

Francis Bacon advised: before any debate – in a broader sense any discussion of a point – terminology must be clarified. Therefore, the problem specified in the title of this paper, if it is to be understood correctly, requires that key terms applied be clearly defined, primarily, the terms quality and quality control.

Here, quality – according to the philosophy of the book *What is Quality* (Glichev *et al.*, 1968) and State Standard 15467-79 (Product Quality, n.d.) and that definition which has been given above, which is based on it – denotes the aggregate of properties of an object (in special cases, a product or a service), which manifest themselves in its consumption/exploitation/use/application and which describe the consumption outcomes, positive and negative, but not the costs of its production and consumption. Product quality depends on three factors:

- (1) the quality of design;
- (2) the quality of materials (stock, semi-finished products and component parts); and
- (3) the quality of work (compliance with design and regulations, i.e. prevention of spoilage).

As is generally known, these factors do not influence product quality to the same extent. Design quality is overwhelmingly the dominant factor in as many as 70 per cent of all cases (Ettinger and van Sittig, 1968).

Unfortunately, people talking of product quality often, too often, reduce it to a single factor, at best two, which is usually the quality of work. For example, throughout the period of the so-called "Five-year Plan of Effectiveness and Quality" in the Soviet Union in the 1970s, reject rate reduction in production was very nearly the main indicator of a successful solution to the quality problem. Meanwhile design quality was actually underestimated or estimated incorrectly. This resulted in considerable losses of economic, social, even political terms. Hereafter, we will speak mainly about design quality, which exerts a dominant influence on the quality of finished products.

With respect to the term quality control one feels the need for a clear explanation of this as well as a number of related terms: quality change, quality improvement, quality loss, quality maintenance and quality stabilisation. Confusing these terms leads to economic and other losses, too. For example, when you familiarise yourself with a promotional statement to the effect that the quality of a product has been improved, you often see that what it does refer to is not an improvement, but at best a change, in quality. Therefore, steps were taken towards more precise definition of these close categories, indeed, their more formalised presentation. Owing to the obvious limit on the size of this paper, we will not present the system of these terms and formalised definitions. We only note that these concepts differ in the completeness of information about the variable parameters the totality of which characterises the quality control process. These quantities are:

- $\Delta\mathcal{X}$ : variation in the figure of merit (in absolute magnitude and in sign); and
- $\Delta T$ : variation in the time interval in which quality changes in absolute magnitude.

In total, 12 conceptually possible combinations of these parameters were identified and each was associated with a quality variation process: improvement, loss, maintenance, stabilisation and control. Note that in this approach quality control is seen as a change (usually improvement) in quality within prescribed limits at a set time.

Unless our terminology is clarified, as we did above, it is pointless and even harmful to use the terms quality and quality control. However, as shown in Glichev *et al.* (1968), this kind of error is fairly common.

#### *Defining an evaluation situation*

Almost every published, as well as unpublished but applied, procedure for quantitative assessment of quality neglects the need, before starting work on such a procedure, to define the evaluation situation. Designers of these procedures, and certainly their users, do not know in what scale – ordinal, interval or ratio – the numerical results of quality measurement will be obtained. In actual fact, these results are overwhelmingly expressed in an ordinal scale, which sharply reduces the arithmetic that can be done with these results. This narrows their area of application; for instance, they cannot be used to stimulate improvement in the quality of a product or a service. Yet, users and designers of these procedures, understandably, try to expand their scope of application and act as if there were a more informative – and much more labour consuming – ratio scale. What happens is that these procedures lead to quite unreliable quality evaluation data.

In order to eliminate this drawback, a designer of a quality estimation method before starting work must obtain answers to three groups of questions specifying the conditions of:

- (1) application of this type of object;
- (2) use of calculated figures of merit; and
- (3) design of a quality assessment method.

Listed below are some – by no means all! – of these questions.

Is it necessary to take into account (in terms of intellectual and physical capacity) the end-user of the object concerned? What is the social rank of the individual from whose perspective the object will be evaluated? Should the so-called patent-law properties be taken into account? Should the highest possible accuracy of estimation be sought in each case, bearing in mind that accuracy grade depends monotonically on the estimation method development and use effort? Should quality estimates of different objects be comparable? (For details of defining an evaluation situation, see Azgaldov (1995a)).

#### *Building a property tree*

It is clear to everyone, as well as justified theoretically, that figures of merit depend to a great extent on the measures/criteria of properties that collectively form a quality model of an object being evaluated. So great is this dependence that it can well lead to the following situation: with one set of measures, object A will be better than object B, and with another set, it may be vice versa, B will be better than A. It is then clear that the set of measures by which quality is evaluated should be presented unambiguously, if not standardised. Furthermore, this set should be ordered/decomposed into a hierarchy, or a property tree (as already mentioned). Unless these two conditions are satisfied, one and the same object may be evaluated very differently, even oppositely. In other words, quality may be measured with a “rubber ruler” rather than a steel one.

Designers are not to blame, being only guilty of the lack of knowledge about the right set of measures to make sure they measure with a “steel ruler”. Many do not even suspect that the problem exists. To illustrate, back in the 1970s, a well-known Soviet economic journal carried an article in which two esteemed academic economists said in plain Russian: “To be brief, we decompose quality in some way or other into separate properties” (Fedorenko and Maiminas, 1971). However, as already mentioned, such an arbitrary decomposition may well lead to a “rubber ruler” situation.

In order to counter this pitfall, qualimetry has established a set of rules, which if followed guarantee that different individuals independently of each other will arrive at almost identical property trees for the same object (Azgaldov, 1996). In most quality evaluation cases, unfortunately, these tree-building rules are not obeyed. Which means that the “ruler” by which quality is measured is anything but a steel one. If follows that we should treat with great caution any results obtained with the help of such a “ruler”.

By way of illustration, a very common fallacy is to leave in a property tree only more important characteristics. The argument is that minor characteristics being unimportant contribute little or nothing to a figure of merit. The argument would be valid, if it were only a matter of neglecting just one property. The fact is, however, that in the great majority of cases, not one but very many properties are excluded from a property tree. Yet, the cumulative importance of these properties can be quite significant; this may add greatly to the error in the final quality estimate.

Another example, one among very many. It is often the case that when two or more objects of the same kind are compared for quality, in order to reduce the calculation effort, some properties equally pronounced in the variants being compared are left out

of consideration. The findings of the comparison are then treated as if they were expressed on a ratio scale; in other words, as already mentioned, it is assumed that this information shows not only *the amount* by which one variant differs from the other, but also *the factor* by which the difference manifests itself. In point of fact, when equally pronounced characteristics are left out, evaluation results cannot be obtained either on a ratio scale ("how many times") or on an interval scale ("to what extent"). In this case, figures of merit can only be expressed on an ordinal scale; in other words, the information obtained tells us which is better in quality, but not how much and, least of all, to what degree.

#### *Weighting*

One of the more common errors in weighting is to depend exclusively on the Delphi technique. In fact, there are analytical (non-Delphi) methods, which can be applied (even if less frequently) to weighting. Moreover, they do much better than Delphi ones in terms of closeness in estimation (one of these methods, perhaps the first ever to be presented in strictly mathematical terms, was devised by Academician Krylov (Krylov, 1951), the noted Russian mechanic and shipbuilder).

Even when Delphi techniques are applied to weighting, ignorance of the basics of the methodology of qualimetry can result in great errors. For example, in the Stiftung Warentest technique, weight factors are rounded to multiples of 5 per cent. Then, for relatively unimportant characteristics whose weights are taken equal to 5 per cent or 10 per cent, the error introduced in calculations due to the use of roughened data can be 50 per cent or more.

Finally, the last but not least, with the Delphi approach to weighting, few if any techniques give an indication of the error at which weight factors were calculated. Meanwhile theoretical qualimetry (Azgaldov, 1982) has long validated calculation formulas that can be applied to interrelated problems:

- given a confidence interval and a confidence probability describing the desirable weighting accuracy, determine the necessary number of panel members; and
- given knowledge of the number of respondents, determine some important statistical characteristics of the expert survey outcomes, e.g. collective expert appraisal error.

To be sure, there are some other aspects to the intelligent application of the Delphi technique the ignorance of which leads to lower accuracy in expert-based results. They are not considered here for lack of space.

#### *Determining benchmarks and rejection values of property measures*

Very many, if not most, practical methods of quality assessment are guilty of one fundamental fallacy. Benchmark values (often poorly termed base ones) of quality characteristics are most often adopted with the help of either of the two algorithms below:

- (1) Select a few objects analogous to the object being evaluated; identify a superior quality object among them; define as benchmarks the values of the individual properties of this object.
- (2) For the set of analogous objects selected by algorithm (1), determine the best values of each property; accept them as benchmarks.

It should be mentioned that theoretical qualimetry has proven theorems implying that the use of either algorithm can lead to large errors in final results, the error probability being higher in the case of the first algorithm. It has also been demonstrated

that the only correct way of benchmarking is to select the world's best (at the time of estimation) values of the measure of the respective property.

The foregoing – as far as frequent errors and benchmarking algorithms are concerned – is also true of the rejection values (often mistermned marginal values) of property measures.

#### *Determining absolute values of property measures*

Very many quality assessment methods here and abroad (including the Warentest approach) use a verbal rather than a numeric technique of gradation of absolute magnitudes of properties. For instance, a five-point verbal scale is often used: "very good", "good", "satisfactory", "unsatisfactory", "very unsatisfactory". Sometimes, an equivalent numeric five-point scale is employed. However, because of the limited number of gradations fractional error increases to  $\pm 20$  per cent.

To reduce fractional error we need, all other things being equal, to increase the number of gradations. Which is not to say that we must maximise it, but that we must optimise it according to man's psychological ability, which admits gradations in the range of 10-12. In other words, we should use the familiar five-point scale complemented with the intermediate values "+" or "-".

Similar results can be obtained if we use a 100 per cent scale with 10 per cent gradations (with the exception of the beginning and the end of the scale, where finer gradations are possible). Of course, this refers to properties that are either too difficult or, for some reason or other, undesirable to represent by common physical units of measure.

#### *Determining relative values of measures*

As has been mentioned above, more primitive quality assessment methods in order to achieve the comparability of the absolute measures  $Q_i$  (by reducing them to the same scale and expressing them in the same units of measure) transform  $Q_s$  into the relative measures  $K_s$  by means of the normalization:

$$K_{ij} = \frac{Q_{ij} - q_i^{rej}}{q_i^{ben} - q_i^{rej}}$$

where:

- $i$  is the property number.
- $j$  is the object number.
- $q_i^{ben}$  is the benchmark value of a property measure.
- $q_i^{rej}$  is the rejection value of a property measure.

Clearly,  $0 \leq K_{ij} \leq 1$  and it expresses a linear relationship between the function  $\mathcal{K}$  and the argument  $Q$ . In actual fact, their relationship is usually nonlinear (Azzgaldov, 1982). It is taken to be linear simply from considerations of easier calculation.

Some practical quality assessment methods, however, depart from the above formula, which obviously results in miscalculations. Departures may be isolated or combinations thereof, as listed below:

- (1) Formula components such as the benchmark value  $q_i^{ben}$  and the rejection value  $q_i^{rej}$  are left out.



- (2) For the properties of one and the same object, two quite different kinds of relationship are used:
- linear at  $Q_{ij} < q_i^{ben} (K_{ij} = Q_{ij}/q_i^{ben})$ ; and
  - nonlinear (hyperbolic) at  $Q_{ij} > q_i^{ben} (K_{ij} = q_i^{ben}/Q_{ij})$

It is clear that the use of two different kinds of relationship has no logical justification whatsoever.

*Factoring in reliability properties*

In the quality assessment practice, the most common approach to factoring in reliability characteristics is to recognise them alongside the other characteristics that collectively constitute quality. But, as already mentioned, qualimetric theory demonstrates that this approach is basically incorrect for two reasons.

First, it is generally not possible to recognise in calculations all the properties that according to State Standard 27.003 – 83 “Reliability in Engineering” collectively define the concept of reliability, viz, retention ability, operational safety, maintainability and lifetime.

Second, and most important, reliability is not sought for its own sake. It is not an end in itself but a means of actualisation of the properties for which a particular product/service was designed in the first place, that is, in general, the properties of functionality and appearance.

For the reasons given above reliability must be accounted for as the efficiency retention factor, which describes the proportion of the benchmark time for the object when it is ready for use, i.e. not under repair or in maintenance or inoperative or obsolescent. This coefficient, varying from 0 to 1, must be multiplied by the contraction function by dint of which all the functionality and appearance properties are recognised; the nature of this function is described in the next section.

*Determining the value of the integral quality index*

As already noted, in the quality assessment method described here (which is not the only one in qualimetry), the quality index  $K^Q$  can be expressed by the weighted average formula:

$$K^Q = K_j^E \sum \mathcal{K}_{ij} \times G_i,$$

where:

$K_j^Q$  is the quality index of the  $j$ th object ( $0 \leq K_j^Q \leq 1$ ).

$K_j^E$  is the efficiency retention factor of the  $j$ th object ( $0 \leq K_j^E \leq 1$ ).

$\Sigma$  is the summation over all the  $i$ th properties describing the quality of the object ( $i = 1, 2, \dots, n$ , where  $n$  is the full number of properties describing the quality of the object).

$K_{ij}$  is a relative measures of the  $i$ th property of the  $j$ th object ( $0 \leq K_{ij} \leq 1$ ).

$G_i$  is the weight coefficient of the  $i$ th property ( $0 < G_i < 1$ ).

Note a characteristic feature of calculating the value of  $K^Q$ . Among the  $i$ th properties, identify so-called “critical properties”, i.e. such that for at least one of them the inequality  $q_{ijw}/\sim q_i^{rej}$  (where  $w/\sim$  stands for “worse or equivalent”) is infeasible.

For example, a critical property for foodstuffs is “presence of harmful chemical substances”.

If this inequality holds for at least one (any) critical property, then we take  $K^K = 0$ .

### Conclusion

To conclude this paper on typical errors in the qualimetric analysis of products we consider it necessary to make the following points:

- (1) the foregoing technique is but one, if the most common, of the many methods of qualimetry;
- (2) only its simplified version – but not a rough-and-ready or, least of all, rigorous one – was considered; and
- (3) the exposition was of necessity very brief.

To conclude, these authors would like to reiterate: if the material presented in this paper is taken into account, anyone writing on the subject of quantitative estimation of quality, whether a theorist or a practitioner, will be enabled to avoid unnecessary errors in their research and practical methods.

### References

- Al-Kindi (1961), *Selected Works of Thinkers of the Near and Middle East*, Moscow.
- Andrews, F.M. (Ed.) (1979), *Scientific Productivity: The Effectiveness of Research Groups in Six Countries*, Vol. XXXIV, Cambridge University Press, London, p. 4.
- Asmus, V.F. (1969), *Plato*, Mysl, Moscow (in Russian).
- Azgal'dov, G.G. (1975), “The best variant selection method: application conditions”, *Ekonomika Stroitel'stva*, No. 6.
- Azgal'dov, G.G. (1981), “Development of the theoretical basis of qualimetry”, doctoral dissertation, XXX, Moscow.
- Azgal'dov, G.G. (1982), *Theory and Practice of Product Quality Assessment: Fundamentals of Qualimetry*, Ekonomika, Moscow (in Russian).
- Azgal'dov, G.G. (1989), “Some drawbacks manifested in the quality evaluation practice”, *Proceedings of the Conference on Upgrading Industrial Engineering in the New Economic Context, Voronezh*, Section 2.
- Azgal'dov, G.G. (1990), “Competitive power and qualimetry”, *Elektronnaya Tekhnika*, Ser. 9, Issue 4.
- Azgal'dov, G.G. (1991), “Some questions of the application of qualimetry in a market economy”, *Problems in Creating a Regulated Market*, Moscow.
- Azgal'dov, G.G. (1994), “Some general information about metrology and qualimetry”, *Standarty i Kachestvo*, No. 11.
- Azgal'dov, G.G. (1995a), “Defining an evaluation situation”, *Standarty i Kachestvo*, Nos 9 and 12.
- Azgal'dov, G.G. (1995b), “Informatisation – quantification – qualimetry”, *Proceedings of the 4th International Forum on Informatisation (MFI-95. Pt 1)*, Moscow.
- Azgal'dov, G.G. (1996), “Building a tree of property measures for an object”, *Standarty i Kachestvo*, No. 11.
- Azgal'dov, G.G. (1998), “Product quality management and qualimetry”, *Rynok i Kachestvo Yaroslavi*, No. 3 (1999, No. 1).

- Ettinger, J. and van Sittig, J. (1968), *More Through Quality*, Standards Publishers, Moscow (transl. from English).
- Fedorenko, N.P. and Maiminas, E.Z. (1971), "Towards the organisation of economic decision making", *Voprosy Ekonomiki*, No. 3.
- Frolov, E.D. (1958), "The life and work of Xenophon", *Proc. of LSU*, No. 251.
- Glichev, A.V., Panov, V.P. and Azgaldov, G.G. (1968), *What is Quality?*, Ekonomika, Moscow (in Russian).
- Gukovsky, M.A. (1947), *Leonardo da Vinci's Mechanics*, USSR Academy of Sciences Publishers, Moscow (in Russian).
- Ifenthaler, D., Pirnay-Dummer, P. and Seel, N.M. (2010), *Computer-based Diagnostics and Systematic Analysis of Knowledge*, Springer, New York, NY, p. XXI.
- Kant, I. (1966), *Works in 6 Vols*, Vol. 6, Mysl, Moscow (in Russian).
- Krylov, A.N. (1951), "On the assessments of projects presented to the competition", *Collected Works of Acad. A.N. Krylov. Pt 1. Memoirs and Memoir Essays*. Moscow-Leningrad.
- Product Quality (n.d.), *Product Quality: Terms and Definitions*. - GOST 15467 – 79.
- Samochvalov, V.V. (2004), "Distinctive features of using the method of analysis of hierarchies in estimating problems on the basis of metric criteria", *Cybernetics and Systems Analysis*, Vol. 40 No. 5.
- Smelyakov, N.N. (1966), "On the quality criteria of industrial products", *Tekhnicheskaya Estetika*, No. 4.
- Sullivan, L.P. (1986), "Quality function deployment", June, available at: [www.deming.nm.ru/TehnUpr/StrFunKa.htm](http://www.deming.nm.ru/TehnUpr/StrFunKa.htm); <http://subscribe.ru/archive/insurance.it2bpro/200512/22110916.html>
- Technometrics (n.d.), *Technometrics*. – In: Wikipedia.
- White, D.J. (1969), *Decision Theory*, Aldine Publishing Company, Chicago, IL.
- Yudin, D.B. (1974), *Mathematical Methods of Management under Incomplete Information*, Sovetskoe Radio, Moscow (in Russian).
- Zimmerer, Th.W. and Stroh, Th.F. (1974), "Preparing managers for performance appraisal", *SAM Advanced Management Journal*, Vol. 39 No. 3.

#### Further reading

- Azgaldov, G.G. and Kostin, A.V. (2008), "Strategic management: main applications", *Strategicheskii Menedzhment*, No. 3 (in Russian).

#### About the authors

Garry G. Azgaldov, a pioneer of Qualimetry, is a Doctor of Economics and a Fellow of the International Academy of Informatisation, the Russian Academy of Natural Sciences, the Academy of Economic Sciences and Business, the Futures Research Academy, the Academy of Quality Problems and the International Guild of Quality Professionals. He is a Chief Researcher at the Central Economics and Mathematics Institute, Russian Academy of Sciences, Moscow. Garry G. Azgaldov is the corresponding author and can be contacted at: [gazgaldov@mail.ru](mailto:gazgaldov@mail.ru)

Alexander V. Kostin is a Candidate of Economics, an intellectual property assessment expert, Deputy Head of the Centre for Intellectual Property Introduction and Commercialisation, Russian State Institute of Intellectual Property, Moscow. His research interests encompass knowledge economies, intellectual property assessment, and applied qualimetry.

---

To purchase reprints of this article please e-mail: [reprints@emeraldinsight.com](mailto:reprints@emeraldinsight.com)  
Or visit our web site for further details: [www.emeraldinsight.com/reprints](http://www.emeraldinsight.com/reprints)